

Pets GPS Tracker

User Instruction


Package

GPS Tracker:




x1

USB Cable:



x1

Collar Button:



Lx1
Sx1

Manual:



x1

Product Parameters and Wearing ways

Product Parameters:

Name: GSM Wireless Data Terminal

Model: TD-05D

Charging Volt : 4.2V

Working Temperature : 0°C-40°C

Color: accord to sample color

Wearing Ways:

1



2



Description: 1): Necklace buckle marked "L" sign with band thickness 4.1mm.

2): 1): Necklace buckle marked "S" sign with band thickness 1mm.

First Step: Apply for a SIM card from the local business hall

- 1: Select a Micro SIM card as advised by your dealer. (same size as the card used in iPhone4) Instead of Virtual Network Operator.
2. The SIM card must support 2G(GSM) network and callers ID.



Normal SIM Card



NORMAL SIM
Card after cutting



NANO Card




Micro SIM Card

NO

YES

Second Step: Inserting SIM card

1. Inserting method: Open the back piece, insert the card like the way as the picture shows below. (Note: the card slot is a Flip-open)
2. Reboot the tracker after inserting the card successfully, then wait for the signal and start to operate following the next step.

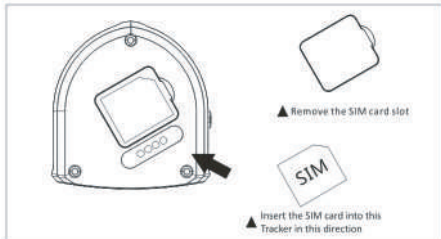

Third Step: Download the APP

1: Open your Wechat and scan the QR code below, download and install it.



Scan the QR code on the left



Fourth Step: Register and Log in

1: When the installation is completed, start to register your personal account and log in.

Tip: pls, if only with the registration code registration code, if you do not use the registration code ID, after registration, other phones using the same account and password, do not need to register again

License: 0-15 characters

Account: Alias


NickName: 0-30 characters

P_number: Please input

Password: 6-12 characters

R_password: 6-12 characters

Language: English Area: Asia and Oceania




Scan the QR code to register

- ▲ REG code: 10 digit ID number or 15 digit REG code, not IMEI number
- ▲ Account: Your monitoring phone number
- ▲ User Alias: pet's name
- ▲ Password: set a password in six numbers + letter (do not forget)
- ▲ Select APP language

Fifth Step: Setting

1: Log in and find the setting, click the phone book or contacts and save the numbers you need. The same goes for the other functions.

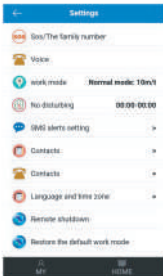

- ▲ Set a SOS number(Mum/ Dad / Brother...)
- ▲ Only those numbers saved in phone book or contacts have the privilege to call the Tracker
- ▲ you should save the numbers in App, then the Tracker can call out these numbers
- ▲ Remember to click the save button

Sixth Step: Calling

To call the Tracker: Just dial the Tracker number and the Tracker answer automatically.

Seventh Step: Location

1: Turn on the Tracker and make sure that it got signal.

2: Open the map on APP, click the location then it will shows your pet's real-time position.

Notes: If the tracker is indoors, it usually position yourself via LBS, and the deviation is inevitable, which depends on the distance between the tracker and Base Station and the environment as well. If you're in outside, it switch to GPS automatically, the range of deviation will also narrowed, but will still become unstable while the Tracker moved, which is normal, you can't regard it as quality issues, won't be listed in After-sale service.

Eighth Step : Indicator definition

1. Long press the power button, the red lights when it boot, lights goes off when the end of the boot state.
2. When there is network or GPS positioning, press the power button, blue light on for 6 seconds.
3. When there is no network or any exception in Tracker, the blue light will always flashing.
4. When Charging, red light on (red light flashing with an interval of 3 seconds), when full charging, red light is always bright, it will goes off after pulling out the USB cable.

Few points need to be confirmed about the SIM card

1. Has 2G GSM Network (not support Telecom card)
2. Has 2G data base
3. Can show callers ID

FAQ:

1. Even if you inserted the SIM card, it still got no signal

- 1): Check the card's type and size to see if it's right, also check if the card has 2G network.
- 2): Check the card to see if it's inserted properly. First shut down the tracker, second, insert the card, then reboot.
- 3): Check the card's Provider to see if it's compatible. (Not support Telecom cards)

2. When you save the numbers it indicates that the device can not connect the network.

- 1). Is there any signal after inserting the card.

- 2). Check whether the Tracker is on or not.(before using the APP, the Tracker must be on)
- 3). Make sure that the SIM card has the data package and make sure you have paid the phone charge and the SIM card is available to call.
- 4). Check whether the Tracker ID match the ID on the tags or not.
- 5). If still not working, please send pw,123456,ts# to the number that inserted in Tracker, then your phone will receive a message from your Tracker, please send the message and the rear cover of the tracker to your local dealer, they will solve this problem as soon as possible.

3. When you call the Tracker, it reminds you the number you have dialed is busy, please try again later.

- 1): Is there any signal after inserting the card, please check.
- 2): Please check you have saved phone numbers on your

APP.

3): Check if you have turn on the DO NOT DISTURB in App and set a time, if yes, please switch to OFF.

4. The positioning function is not working.

1): go outside and try again.

2): Once the Tracker goes to SLEEP MODE, it will switch to SAVE POWER MODE, which means the function of uploading data is OFF, at this time, you can refresh the positioning and shake the Tracker to wake it up.

5. Neither charge nor boot

The battery enter into a self-protection mode, please follow these steps:

1): Try another USB Cable to see if the original one was damaged

2): Press the POWER key for 50 seconds, then recharge, it

will indicate recharging on the Tracker after 1 minutes, at this time you can reboot.

3): If still not working, the tracker has a recovery time, after two days, it has no power and then recharge it ,it should be work.

6. No voice on tracker or phone.

1):Check the volume + - while calling. If the Tracker switch to max. still no voice, the speaker must damaged, it need be repaired.

7. The tracker can receive any call

Apply to your local operator for a function of showing callers ID.

8. The ID in the Tracker is different from the cover of the Tracker, resulting in the Tracker not connect the Server.

Reset the IMEI, according to IMEI number stick on tracker.
Please Send: pw,123456,imei,xxxxxxxxxxxxxxxx# to Tracker.
(Message must be use English input method)
If the Tracker only has ID Number (Such as ID number
2123456789), please send: pw,123456,imei,
000021234567890# to Tracker.